



SIMPLICIO IVY

COLOR/FINISH: DARK & LIGHT GREEN

LEAF SPECS

Width	2 3/4 - 5/16"
Length	3 1/2 - 1 3/4"
Type	Assorted

MATERIAL SPECIFICATIONS

Low density polyethelene (LDPE)

Density	.957
Minimum Temp.	-76° F
Maximum Temp.	250° F
Shade Percentage	85%
Backing Thickness	1/8"

PANEL SIZE/WEIGHT

Height (Inches)	2 1/4"
Length (Inches)	20"
Width (Inches)	20"
Weight (Lbs)	1 lbs/panel




EASY CUT TO FIT

PROFILE



BACKING GRID

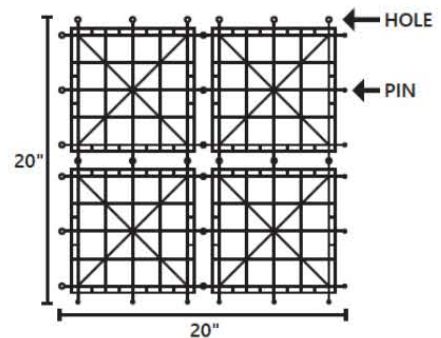

ECO-FRIENDLY

Ivy Installation Instructions

- Determine how much surface area needed to be covered.
- Order 3-5% extra ivy as you will have scrap during the installation process.
- The ivy comes in 20" x 20" or 24" x 24" squares depending on the type.
- Ivy is dye lot sensitive, if you reorder ivy for an existing area make sure to ask for the same dye lot as the original order.
- Use scissors or a carpet knife to trim the ivy to fit the surface area as needed.

Ivy Benefits and Features

- ★ Connect and cut for a perfect fit
- ★ 3 year manufacturer's warranty
- ★ Low maintenance
- ★ Graffiti deterrent
- ★ UV stable
- ★ Cleans easy



5 Centerpointe Drive - Suite 400
Lake Oswego, OR 97035



Office Number:
1.888.453.5979

turfandivy.com

SIMPLICIO IVY

PRODUCT CUT SHEET BLOCK/CONCRETE WALL MOUNT




LEGEND

1. 20" x 20" PANEL.
2. ADJACENT INTERLOCKING PANEL.
3. INTERLOCKING TAB.
4. TWO (2) PER 12" SQUARE PANEL, OR PER MANUFACTURER RECOMMENDATION.

SECURE TILE IVY SQUARE FROM THE TOP OF THE PANEL THROUGH FORMED HOLES.

5. SECURE PANEL AT FOUR (4) LOCATIONS WHEN PANELS ARE AT THE TOP AND BOTTOM OF WALL.

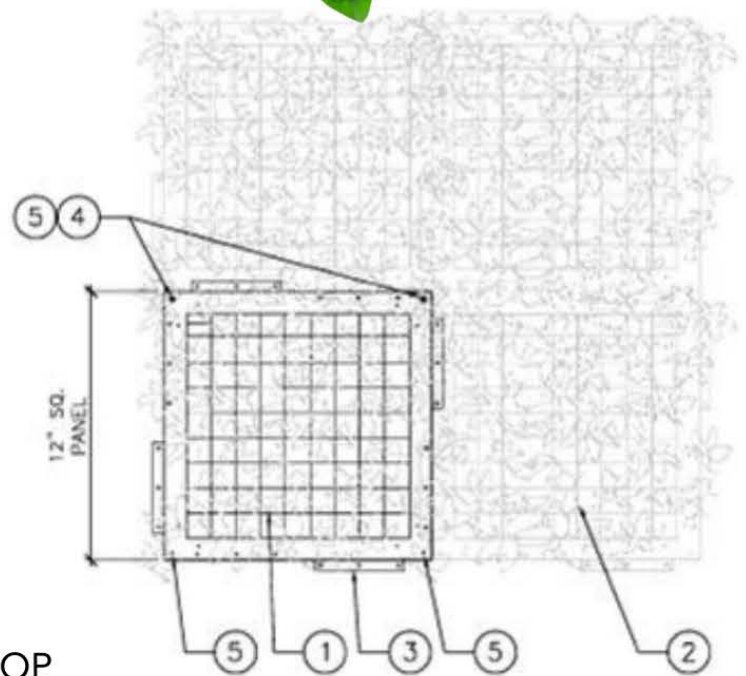

FENDER WASHER
3/16" X 1 - 1/4" X 1 1/4"



CONCRETE ANCHOR
DIAMETER
3/16" X 1/4"

SIMPLICIO IVY

PRODUCT CUT SHEET CHAINLINK/ROD IRON FENCING MOUNT




LEGEND

1. 20" x 20" PANEL.
2. ADJACENT INTERLOCKING PANEL.
3. INTERLOCKING TAB.
4. OUTSIDE PERIMETER TWO (2) PER 12" SQUARE PANEL EVERY 6", OR MANUFACTURER RECOMMENDATION

SECURE TILE/PANEL THRU BAND OR FORMED HOLES

5. INSIDE PERIMETER SECURE TILES/PANELS EVERY SQUARE FOOT, OR MANUFACTURER RECOMMENDATION

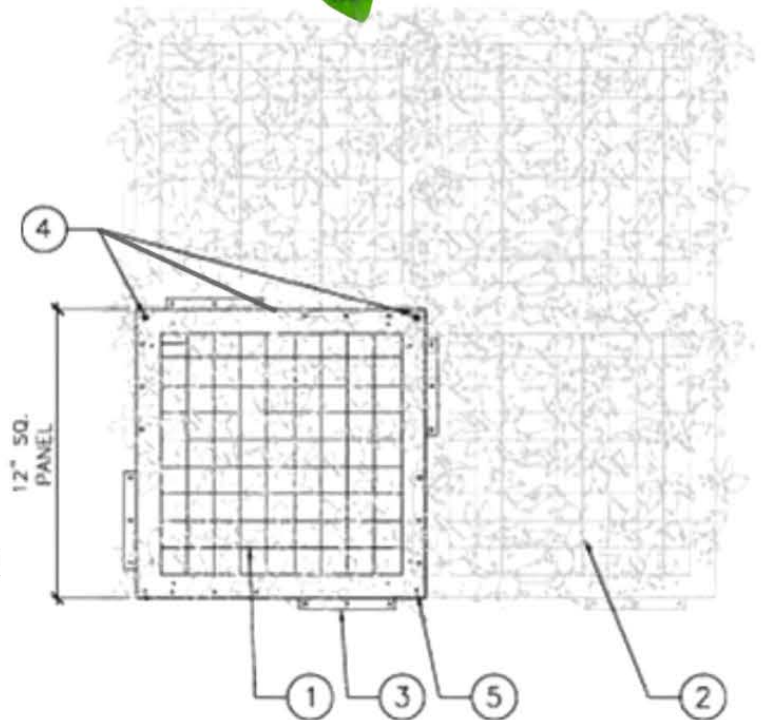

8" – 14" CABLE TIES
OUTDOOR USE
UV RESISTANT
FLEXIBLE NYLON MATERIAL