



# TURF AND IVY

SOLUTIONS

*It makes sense.*



## ONYX

### USES

- ▶ Landscape
- ▶ Lawns
- ▶ Playgrounds
- ▶ Traffic Medians
- ▶ Pet Areas
- ▶ Commercial or Residential
- ▶ Light-Heavy Traffic



15 Year Manufacturer's Warranty  
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

T&I Grass

Infill


Weed Barrier \*  
Optional

½ Decomposed Granite  
or Class II Road Base

2-2½ Drain Rock

Wire Mesh \*  
Optional

Soil (ground)

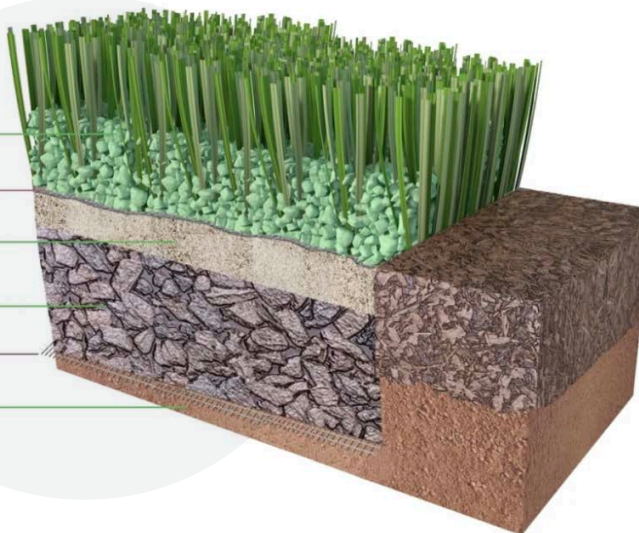

## HOLLOW BLADE

### SPECIFICATIONS

Pile Height: 1-¾"

Turf Gauge: 3/8"

Face Weight: 60 oz./yd<sup>2</sup>

Backing Weight: 26 oz./yd<sup>2</sup>

Total Weight: 86 oz./yd<sup>2</sup>

Stitch Rate: 14/10cm

Stitches/M<sup>2</sup>: 14700

Material/Dtex: PE 9300 + PP 4000

Color: Lime Green and Emerald Green with  
Brown and Green Thatching

Type Of Fiber: PE Monofilament and PP Curled

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium T&I Backing

Tuft Bind: 11+ lb./force (ASTM D1335)

Blade Type: Hollow Shape

Permeability: 63.7 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: ≥200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 904 lbs



5 Centerpointe Dr. Ste 400, Lake Oswego, Oregon 9703 USA

Telephone: 1-888-453-5979

www.turfandivy.com | Email: info@turfandivy.com