

SOLUTIONS It makes sense.

STABILITY




- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

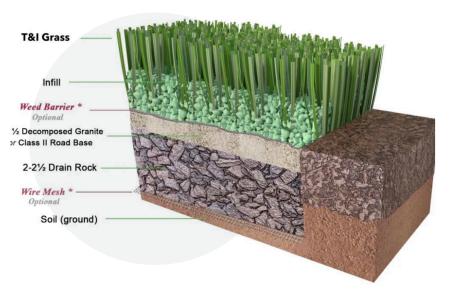



SPECIFICATIONS

Pile Height: 1.58"

Turf Gauge: 3/8"

Face Weight: 50 oz./yd²

Backing Weight: 28 oz./yd²

Total Weight: 78 oz./yd²

Stitch Rate: 11/10cm

Stitches/M²: 11550

Material/Dtex: PE12000 + PP4400

Color: Lime Green and Emerald Green with **Brown and Green Thatching**

Type Of Fiber: PE Monofilament and PP Curled

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Double PP PU Backing

Tuft Bind: 12+ lb/force (ASTM D1335)

Blade Type: M Shape Blade

Permeability: 115.1 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 692 lbs





