




TURF AND IVY

SOLUTIONS

It makes sense.




SOD STAPLE 6" x 1" x 6"

DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

SEAMING TAPE

SPECIFICATIONS

YARN TYPE POLYETHYLENE BLADE
 THATCH YARN TYPE POLYPROPYLENE CURLED AS THATCH
 PILE HEIGHT 1 3/4"
 TURF GAUGE 3/8"
 FACE WEIGHT 60 OZ/YD²
 BACKING WEIGHT 46 OZ/YD²
 TOTAL WEIGHT 106 OZ/YD²
 STITCH RATE 10.2/10 CM
 STITCHES/M² 10710
 COLOR LIME GREEN, FIELD, LIGHT BROWN AND EMERALD GREEN
 GREEN WITH BROWN AND FIELD GREEN THATCHING

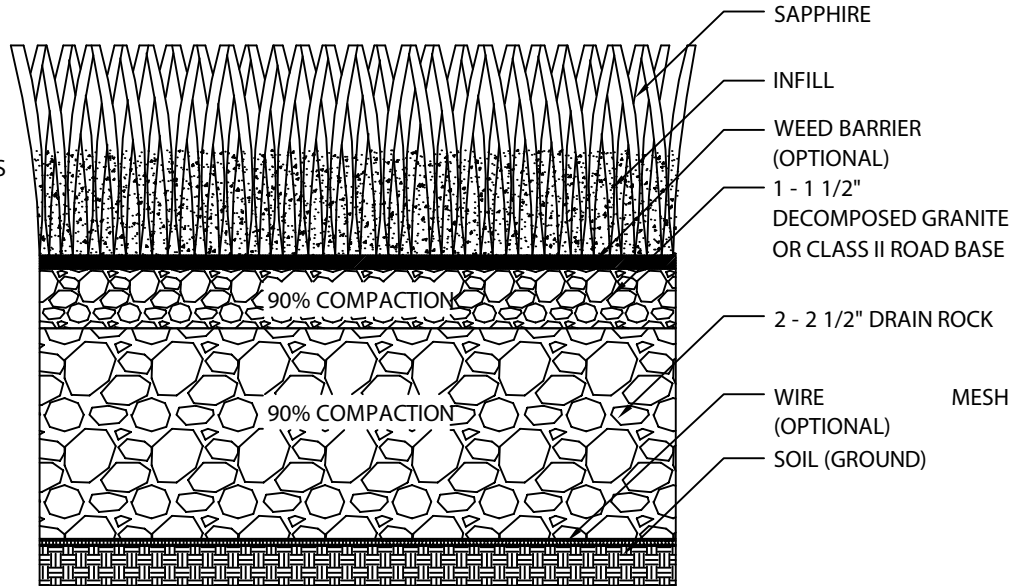

SAPPHIRE

INFILL

WEED BARRIER (OPTIONAL)

1 - 1 1/2" DECOMPOSED GRANITE OR CLASS II ROAD BASE

2 - 2 1/2" DRAIN ROCK

WIRE (OPTIONAL) MESH


SOIL (GROUND)

SECTION

ROLL SIZE (FEET) 15' x 100'
MAXIMUM DRAIN RATE >30 INCHES PER HOUR



SEAMING
SOD STAPLES ARE RECOMMENDED TO SEAM THE SEAMS




SECURING TURF TO BASE
BRIGHT COMMON 40D/60D NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER SEAMS.



POWER BROOM AFTER INSTALLATION IS COMPLETE

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: FIELD GREEN AND OLIVE GREEN WITH BROWN AND FIELD GREEN THATCHING.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PERFORMANCE SERIES

SAPPHIRE

5007-010



5 Centerpointe Drive - Suite 400
Lake Oswego, OR 97035



Office Number:
1.888.453.5979

turfandivy.com