




# TURF AND IVY

## SOLUTIONS

*It makes sense.*

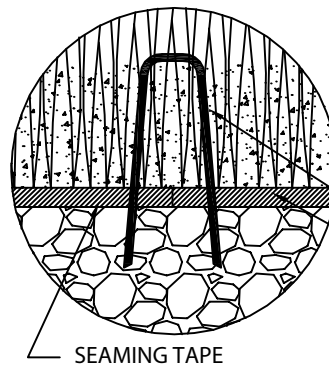


SOD STAPLE 6" x 1" x 6"  
DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

SEAMING TAPE

### SPECIFICATIONS


YARN TYPE POLYETHYLENE S SHAPE  
BLADE  
THATCH YARN TYPE POLYPROPYLENE CURLED AS THATCH  
PILE HEIGHT 1 3/4"  
TURF GAUGE 3/8"  
FACE WEIGHT 90 OZ YD<sup>2</sup>  
BACKING WEIGHT 22 OZ YD<sup>2</sup>  
TOTAL WEIGHT 112 OZ YD<sup>2</sup>  
STITCH RATE 20.5/10 CM  
STITCHES/M<sup>2</sup> 21525  
COLOR EMERALD GREEN AND OLIVE GREEN WITH BROWN AND GREEN THATCHING  
ROLL SIZE (FEET) 15' x 75'  
MAXIMUM DRAIN RATE >30 INCHES PER HOUR

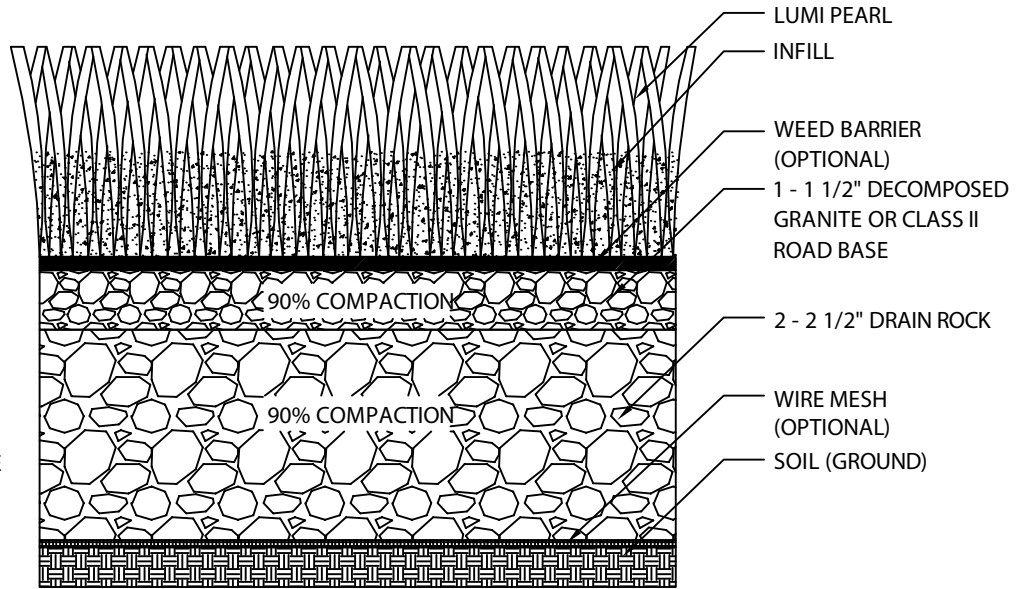

### SECTION



**SEAMING**  
SOD STAPLES ARE RECOMMENDED TO SEAM THE SEAMS




**SECURING TURF TO BASE**  
BRIGHT COMMON 40D/60D NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER SEAMS.



POWER BROOM AFTER INSTALLATION IS COMPLETE

### NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: EMERALD GREEN AND OLIVE GREEN WITH BROWN AND GREEN THATCHING.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



## PERFORMANCE SERIES | ENGINEERED BLADES

LUMI PEARL

5006-012



5 Centerpointe Drive - Suite 400  
Lake Oswego, OR 97035



Office Number:  
1.888.453.5979

[turfandivy.com](http://turfandivy.com)