




TURF AND IVY


SOLUTIONS

It makes sense.



SOD STAPLE 6" x 1" x 6"
DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

SEAMING TAPE

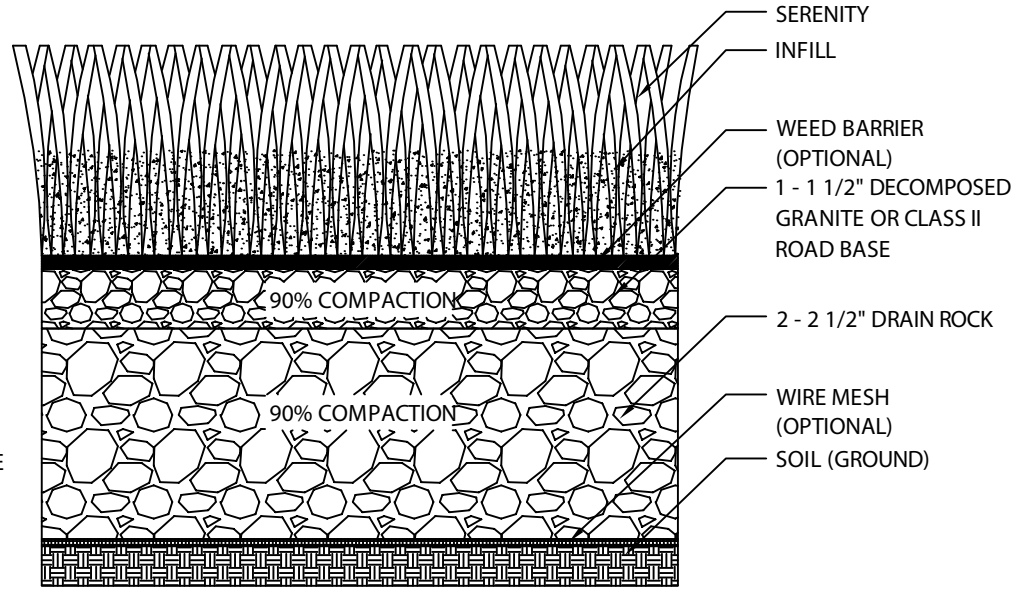


SECTION

SPECIFICATIONS

YARN TYPE	POLYETHYLENE DIAMOND
SHAPE BLADE	
THATCH YARN TYPE	TEXTURIZED
POLYPROPYLENE	
PILE HEIGHT	3/4"
TURF GAUGE	3/8"
FACE WEIGHT	35 OZ YD ²
BACKING WEIGHT	24 OZ YD ²
TOTAL WEIGHT	59 OZ YD ²
STITCH RATE	16/10 CM
STITCHES/M ²	16800
COLOR	EMERALD GREEN AND OLIVE GREEN WITH BROWN THATCHING
ROLL SIZE (FEET)	15' x 200'
MAXIMUM DRAIN RATE	>30 INCHES PER HOUR



SEAMING
SOD STAPLES ARE RECOMMENDED TO SEAM THE SEAMS




SECURING TURF TO BASE
BRIGHT COMMON 40D/60D NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER SEAMS.



POWER BROOM AFTER INSTALLATION IS COMPLETE

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: EMERALD GREEN AND OLIVE GREEN WITH BROWN THATCHING.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PERFORMANCE SERIES | ENGINEERED BLADES

SERENITY

5006-001



5 Centerpointe Drive - Suite 400
Lake Oswego, OR 97035



Office Number:
1.888.453.5979

turfandivy.com