




TURF AND IVY

SOLUTIONS

It makes sense.



SOD STAPLE 6" x 1" x 6"

DRAINAGE PASS THROUGH FOR WATER IN PUNCHED HOLES THROUGHOUT BACKING

SEAMING TAPE

SPECIFICATIONS

YARN TYPE POLYETHYLENE M BLADE
THATCH YARN TYPE POLYPROPYLENE CURLED AS THATCH

PILE HEIGHT 1 5/8"

TURF GAUGE 5/8"

FACE WEIGHT 50 OZ/YD²

BACKING WEIGHT 26 OZ/YD²

TOTAL WEIGHT 76 OZ/YD²


STITCH RATE 20/10 CM

STITCHES/M² 12600

COLOR LIME GREEN AND EMERALD GREEN WITH BROWN AND FIELD GREEN THATCHING

ROLL SIZE (FEET) 15' x 100'

MAXIMUM DRAIN RATE >30 INCHES PER HOUR

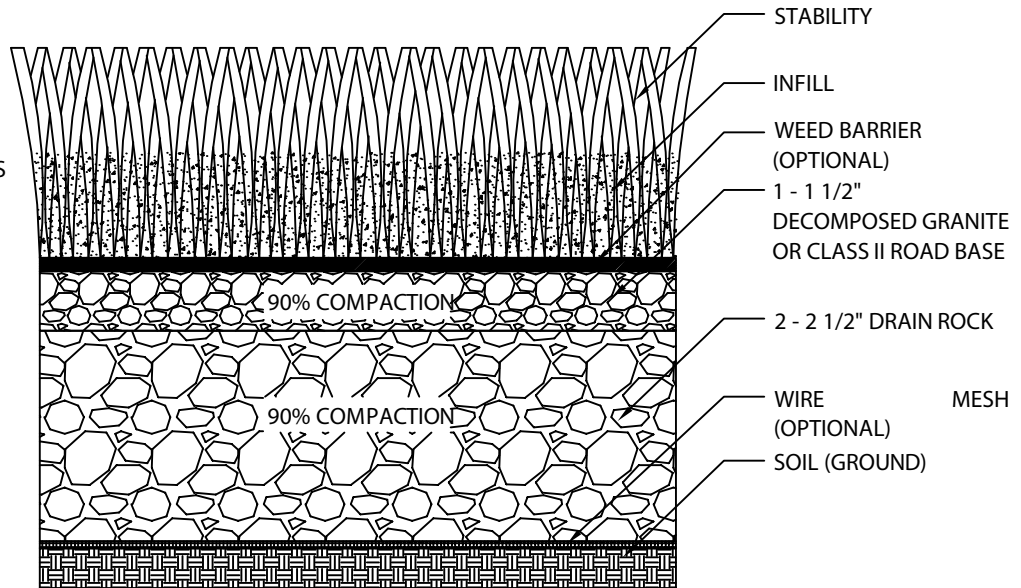


SECTION



SEAMING

SOD STAPLES ARE RECOMMENDED TO SEAM THE SEAMS



SECURING TURF TO BASE


BRIGHT COMMON 40D/60D NAILS OR GALVANIZED NAILS 6' APART ALONG PERIMETER SEAMS.



POWER BROOM AFTER INSTALLATION IS COMPLETE

NOTES:

1. THE GRASS MUST BE INSTALLED AND SEAMED WITH ADJACENT PIECES RUNNING IN THE SAME DIRECTION. SEAMS SHOULD BE GLUED WITH SUITABLE SEAMING GLUE AND SEAMING CLOTH, OR RECOMMENDED SEAMING TECHNIQUES.
2. COLOR: FIELD GREEN AND OLIVE GREEN WITH BROWN AND FIELD GREEN THATCHING.
3. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
4. DO NOT SCALE DRAWING.
5. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
6. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.



PERFORMANCE SERIES

STABILITY

5007-007



5 Centerpointe Drive - Suite 400
Lake Oswego, OR 97035



Office Number:
1.888.453.5979

turfandivy.com