




# TURF AND IVY

SOLUTIONS

*It makes sense.*



## VITALITY

### USES

- ▶ Pet Areas
- ▶ Sports
- ▶ Landscape
- ▶ Commercial or Residential
- ▶ Medium-Heavy Traffic

## STEMGRASS BLADE

### SPECIFICATIONS

Pile Height: 1-1/4"

Turf Gauge: 3/8"

Face Weight: 63 oz./yd<sup>2</sup>

Backing Weight: 29 oz./yd<sup>2</sup>

Total Weight: 92 oz./yd<sup>2</sup>

Stitch Rate: 16/10cm

Stitches/M<sup>2</sup>: 16800

Material/Dtex: PE12500 + PP4000

Color: Emerald Green and Olive Green with Green Thatching

Type Of Fiber: PE Monofilament Diamond Shaped Stemgrass and PP Curled As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium T&I Backing

Tuft Bind: 9+ lb/force (ASTM D1335)

Blade Type: Stemgrass Blade

Permeability: 62.9 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500


Total Roll Weight: 894 lbs



15 Year Manufacturer's Warranty  
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

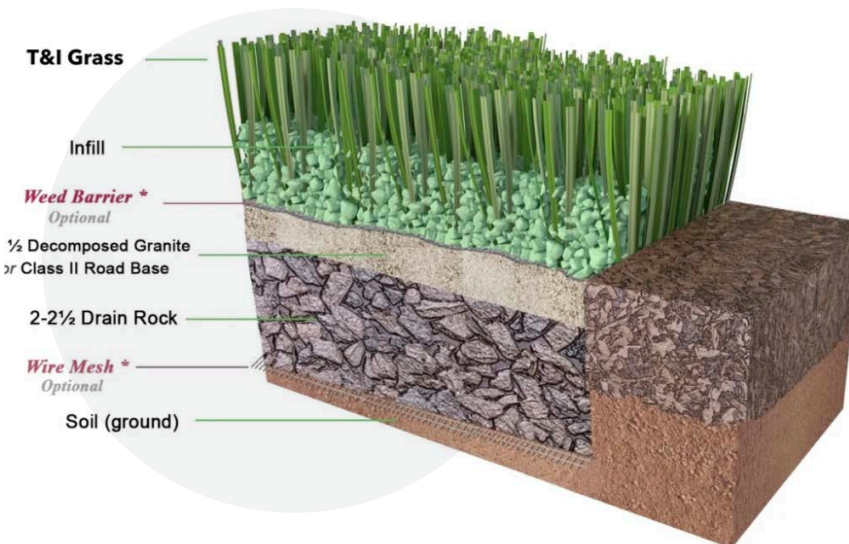

5 Centerpointe Dr. Ste 400, Lake Oswego, Oregon 9703 USA

Telephone: 1-888-453-5979

www.turfandivy.com | Email: info@turfandivy.com